GENERAL NOTES:

THE GRADE LINES SHOWN DENOTE THE FINISHED ELEVATION OF THE PROPOSED SURFACING AT GRADE POINT SHOWN ON THE TYPICAL SECTIONS. GRADE LINES MAY BE ADJUSTED AT THEIR BEGINNING AND ENDING AND AT STRUCTURES AS DIRECTED BY THE ENGINEER IN ORDER TO SECURE A PROPER TIE IN.

CLEARING ON THIS PROJECT SHALL BE PERFORMED TO THE LIMITS ESTABLISHED BY METHOD II.

THE CONTRACTOR WILL BE REQUIRED TO DO ALL NECESSARY WORK TO PROVIDE SUITABLE CONNECTIONS WITH ALL ROADS STREETS, AND DRIVES ENTERING THIS PROJECT. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR THE PARTICULAR ITEMS INVOLVED.

THE CONTRACT INCLUDES THE FOLLOWING ITEMS FOR WHICH QUANTITIES AND LOCATIONS WILL BE DETERMINED BY THE ENGINEER DURING CONSTRUCTION:

- UNDERCUT EXCAVATION
- ADDITIONAL GUARDRAIL POST
- SUPPLEMENTAL CLEARING AND GRUBBING

NO SUBSURFACE PLANS ARE AVAILABLE ON THIS PROJECT. THE CONTRACTOR SHOULD MAKE HIS OWN INVESTIGATION AS TO THE SUBSURFACE CONDITIONS.

UTILITY OWNERS ON THIS PROJECT ARE DUKE POWER, BELLSOUTH, PIEDMONT NATURAL GAS, AND TIME WARNER CABLE.

ANY RELOCATION OF EXISTING UTILITIES WILL BE ACCOMPLISHED BY OTHERS, EXCEPT AS SHOWN ON THE PLANS.

LIST OF STANDARD DETAILS:

ROADWAY ENGLISH DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STDS. DRAWINGS" - HIGHWAY DESIGN BRANCH- N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, NC. DATED JULY, 2006 AND THE LATEST REVISION THERETO ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
200.02	METHOD OF CLEARING - METHOD II
846.01	CONCRETE CURB, GUTTER AND CURB AND GUTTER
848.01	CONCRETE SIDEWALK
862.02	GUARDRAIL INSTALLATION
1130.01	DRUM
1605.01	TEMP. SILT FENCE
1632.02	ROCK INLET SEDIMENT TRAP-TYPE B

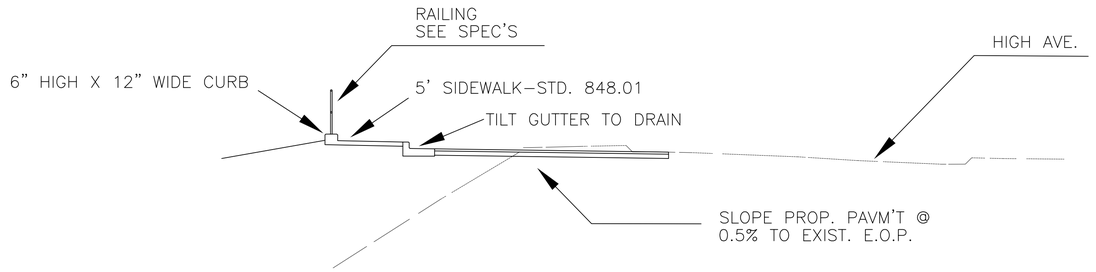

TYPICAL SECTION

PAVEMENT DESIGN:

2" BIT. CONC. SURFACE COURSE,
TYPE S9.5B @ 112 LBS/SY
IN EACH OF TWO LAYERS

4" BIT. CONC. BASE COURSE,
TYPE B25.0 @ 456 LBS/SY
IN ONE LAYER

INCOMPLETE PLANS
DO NOT USE FOR R/W ACQUISITION

PRELIMINARY PLANS
DO NOT USE FOR CONSTRUCTION

REV.	BY	DATE	DESCRIPTION

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
RAIL DIVISION

Gannett Fleming
GANNETT FLEMING, INC.
301 S. McDOWELL STREET SUITE 914
CHARLOTTE, NORTH CAROLINA 28204
PHONE: 704-375-2438 FAX: 704-332-9361

DATE:

PROJECT	GF NO. 39904.360		
TITLE	GENERAL NOTES - STD DETAILS - TYP SECT		
LOCATION	HIGH POINT, NC; GUILFORD COUNTY		DRAWING
DGN BY	RAILROAD		
DWN BY	VAL SEC		ISSUE
CHK BY	DATE January 07	SCALE	SHEET 2 OF

R:\39904.360 High Point\Sheet Set\TYPICAL.dwg
12/7/2006 1:25 PM